

An aerial photograph of a mountain valley. In the foreground, a steep, rocky slope descends from the left, showing distinct horizontal geological layers. The middle ground features a wide valley with a large, calm lake. The background consists of more mountain ranges under a hazy sky. The overall color palette is muted, with greys, blues, and earthy tones.

TSGS

PU Plain

● B3H318

GLD010#
SIL810#
BLK831
BLK141
BLK241
WHI060
RED121
RED421
RED521
RED921
RED131
RED231#
RED331
ORG390
ORG490

YEL380
YEL480
YEL680
YEL780
YEL880
GRN631
GRN731
GRN141
GRN241
GRN441
GRN641
BLU981
BLU091
BLU191
BLU591

BLU691
BLU791
BLU891
BLU991
BLU002
PLE880
PLE090
PLE290
PLE390
BRO570
BRO670
BRO770
BRO080
PNK150#
PNK250#

PNK350#
ORG590#
ORG690#
LGR530#
LGR630#
WHI060
WHI260
GLD700
GLD110
GLD210
GRN631
BLU391
PLE290
BRO770











● B3H368


● B3H328

GLD700
GLD210
SIL810
BLK931
BLK241
RED121
RED421
RED231
RED721
GRN631
GRN831
BLU981
BLU291
PLE880
PLE090

BRO370
BRO570
BRO770
YEL580
RED821
BLU491
PLE190
GRN041
BLU202#
PLE590#
GLD510#
PLE690#
BLU302#
WHI060
WHI260

PU Plain

Product information			
	Average thickness 0.11mm		Laser/ Die-Cut
	Layerable		Cool peeling
	Wait 24 hours before first wash		50-time wash
Standard Glue			
	Temp needed: 135°C for standard glue suitable for 100% cotton and nylon		Time needed: 15 seconds for standard glue
Special Glue			
	Temp needed: 150°C for water repellent fabrics and nylon materials		Time needed: approx. 30 seconds for special glue

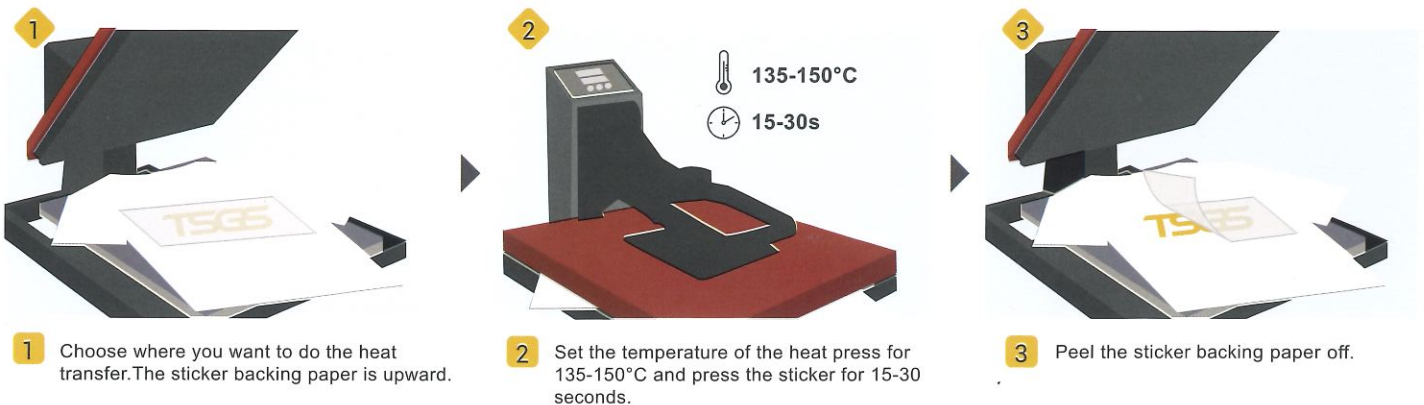

PU With Embroidered




● B3H338



● B3H348



● B3H358

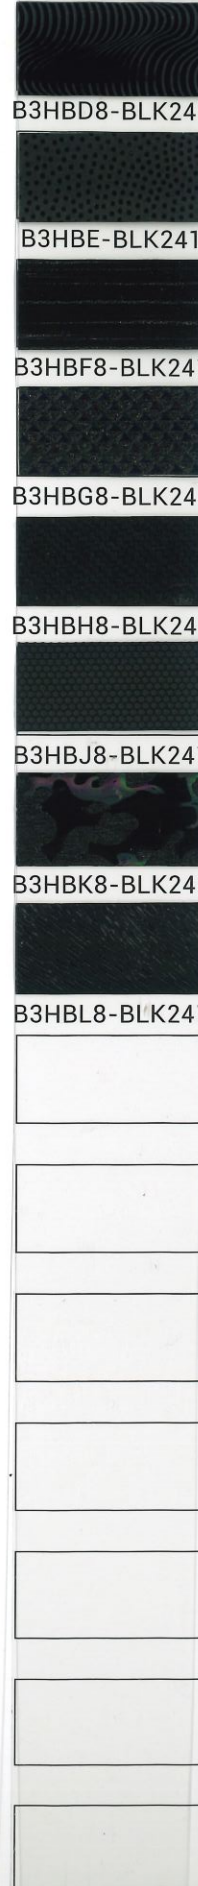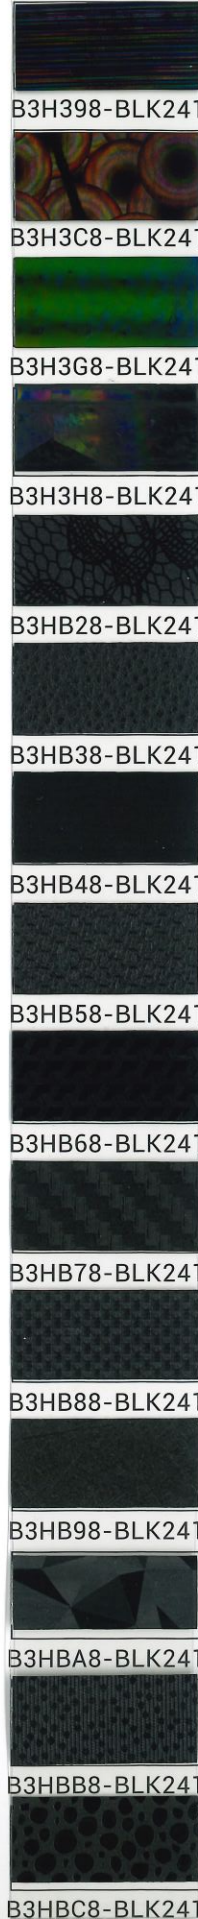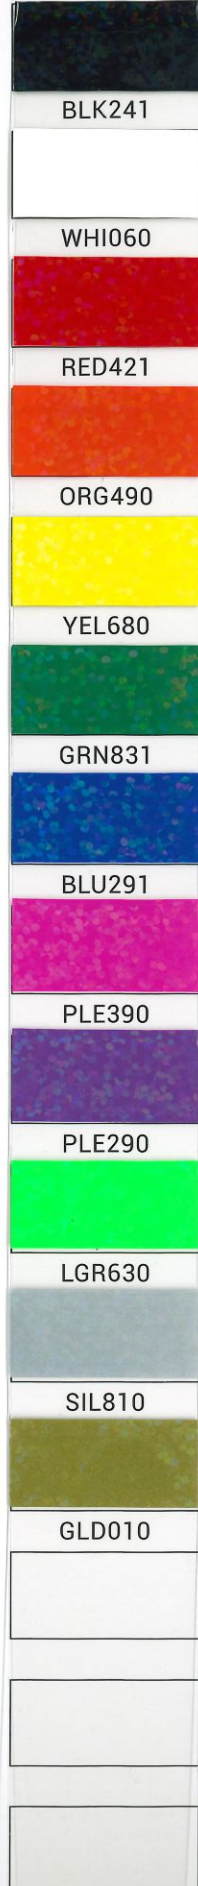











● B3HC18




PU With Textures

Product information


	Average thickness 0.15mm		Laser/ Die-Cut
	Layerable		Cool peeling
	Wait 24 hours before first wash		50-time wash
Standard Glue			
	Temp needed: 135°C for standard glue suitable for 100% cotton and nylon		Time needed: 15 seconds for standard glue
Special Glue			
	Temp needed: 150°C for water repellent fabrics and nylon materials		Time needed: approx. 30 seconds for special glue



1 Choose where you want to do the heat transfer. The sticker backing paper is upward.

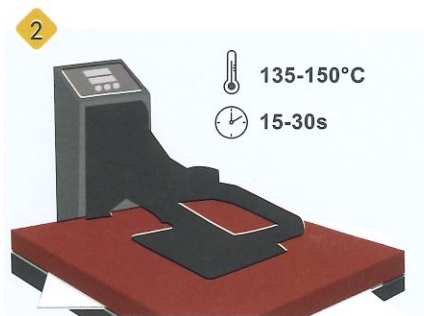

2 Set the temperature of the heat press for 135-150°C and press the sticker for 15-30 seconds.

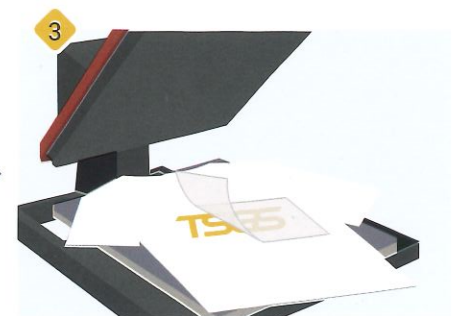

3 Peel the sticker backing paper off.

TSGS Inc.
台灣博迪股份有限公司

 www.tsgs.asia
 tape@tsgs.asia
 +886-3-4389900
 No.855, Huannan Rd., Guanyin Dist.,
Taoyuan City 328, Taiwan (R.O.C.)




Official Website

Foil


● B3H218



● B3H238

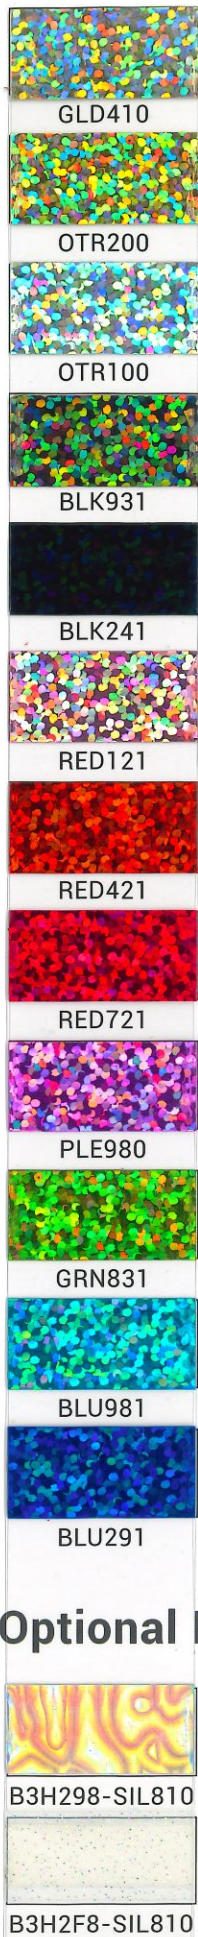


● B3H248

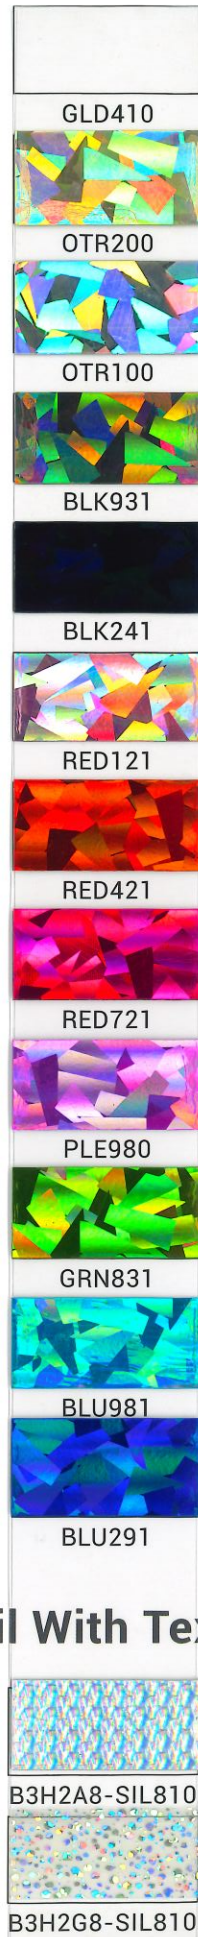


● B3H258








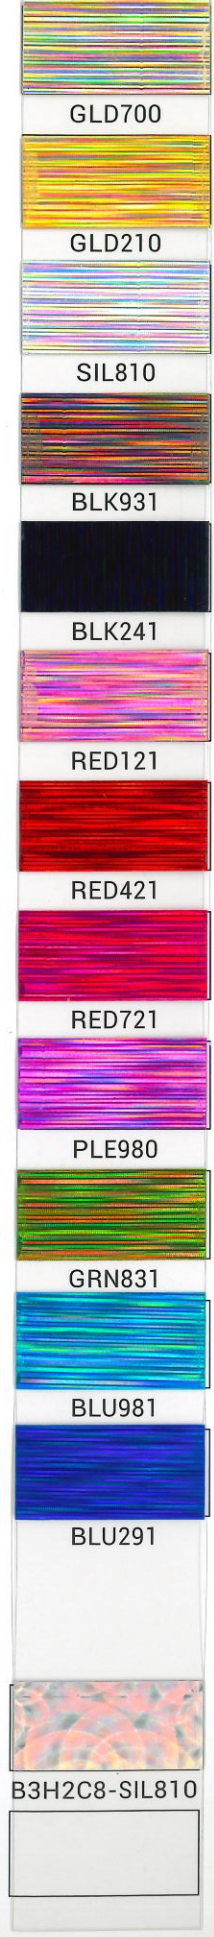

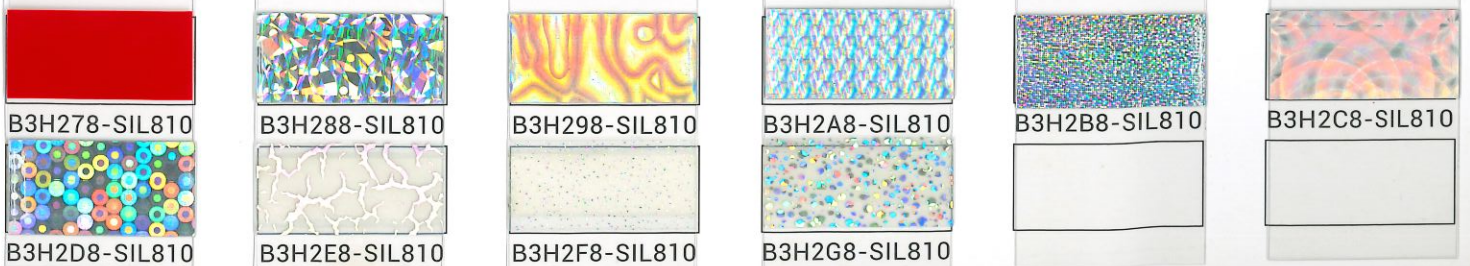


● B3H268



Other Optional Foil With Textures



Foil

Product information			
	Average thickness 0.08mm		Laser/ Die-Cut
	Not Layerable		Cool peeling
	Wait 24 hours before first wash		50-time wash
Standard Glue			
	Temp needed: 135°C for standard glue suitable for 100% cotton and nylon		Time needed: 15 seconds for standard glue
Special Glue			
	Temp needed: 150°C for water repellent fabrics and nylon materials		Time needed: approx. 30 seconds for special glue




Glitter Powder

● B3H138 1/128"



● B3H118 1/256"

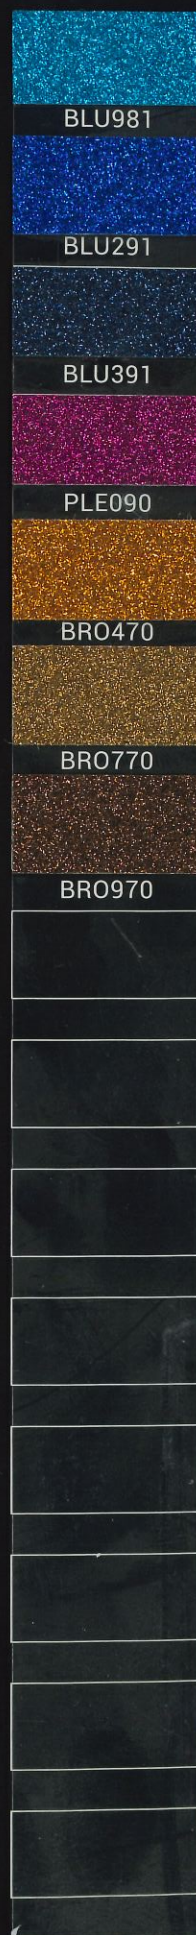





TEMPERATURE
135-150°C



PEEL
Warm Peeling




TIME
15-30s



PRESSURE
Medium or high
even pressure



MATERIALS
Mostly compatible



WASH
In-side out

TSGS Inc.
台灣博迪股份有限公司

 www.tsgs.asia
 tape@tsgs.asia
 +886-3-4389900
 No.855, Huannan Rd., Guanyin Dist.,
Taoyuan City 328, Taiwan (R.O.C.)



Official Website

Glow in Dark

• B3H828



Luminance report


Measuring Instrument Model: LS-150

Luminance on sample: E=1000lx

Type of lighting source: D65

Temperature: 20°C

Product	WHI160				
Minimum Luminance mcd/m ²					
Decay time (minutes)					
min	1	2	10	30	60
mcd/m ²	1262	686	138	41	18

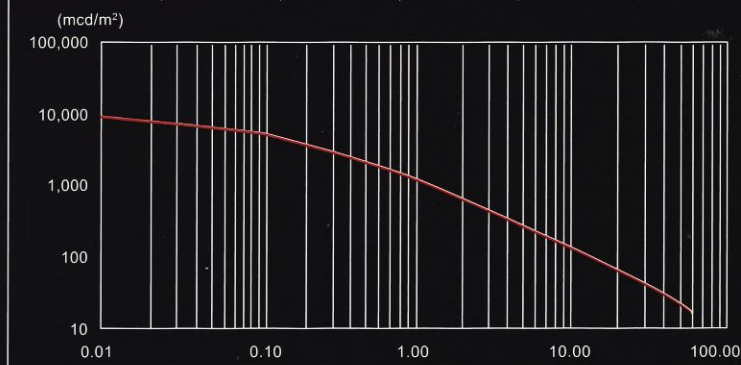

Product information

	Average thickness 0.11mm
	Laser/ Die-Cut
	Layable
	Cool peeling
	Wait 24 hours before first wash
Standard Glue	
	Temp needed: 135°C for standard glue suitable for 100% cotton and nylon
	Time needed: 15 seconds for standard glue
Special Glue	
	Temp needed: 150°C for water repellent fabrics and nylon materials
	Time needed: approx. 30 seconds for special glue

TSGS Inc.
台灣博迪股份有限公司

www.tsgs.asia
tape@tsgs.asia
+886-3-4389900
No.855, Huannan Rd., Guanyin Dist.,
Taoyuan City 328, Taiwan (R.O.C.)





Official Website

Circle Mesh

● PU



● Foil


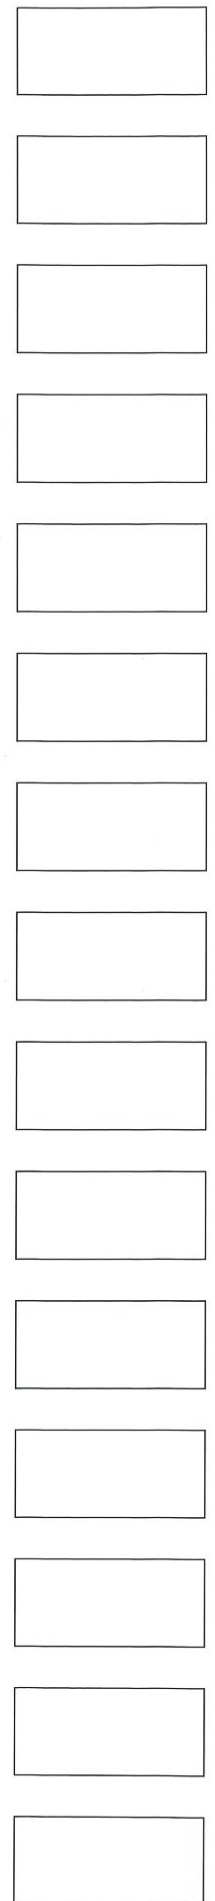
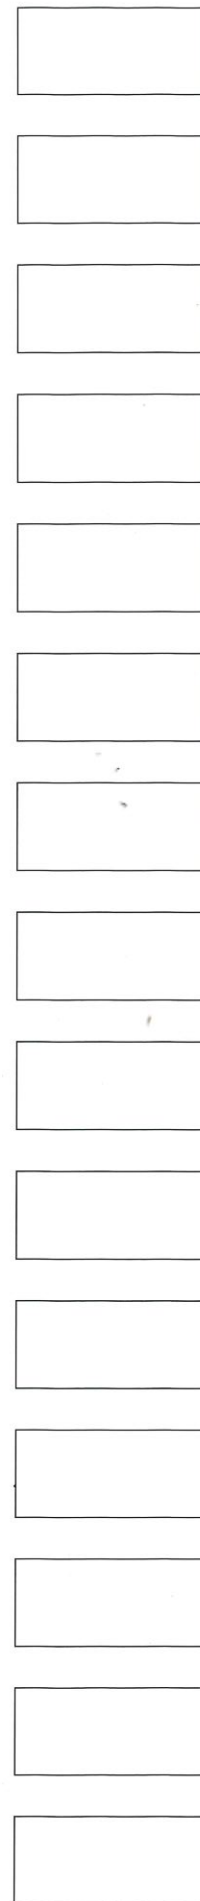


Heart Mesh

● Glitter



● PU

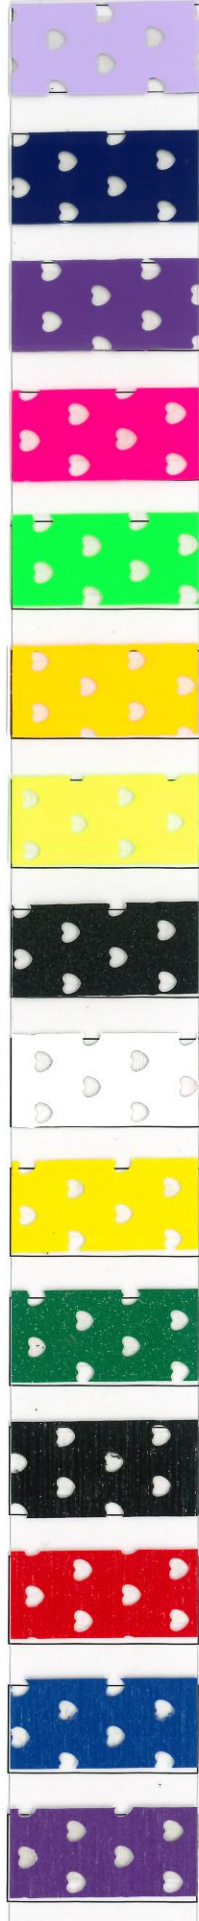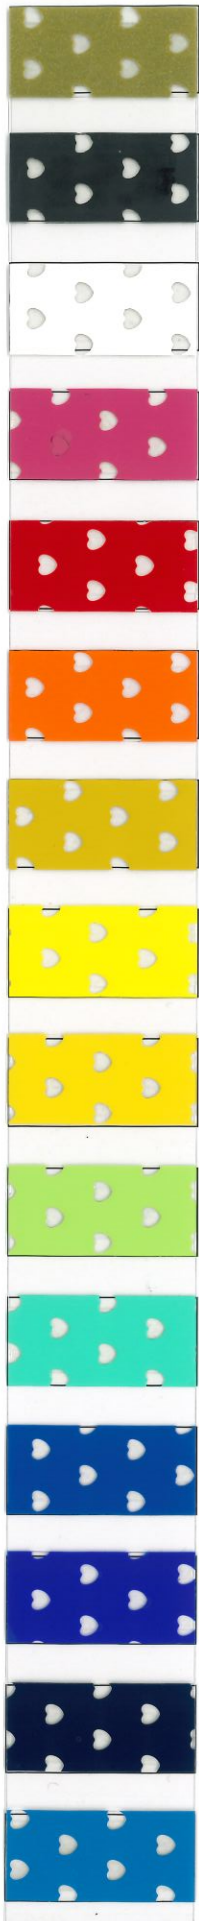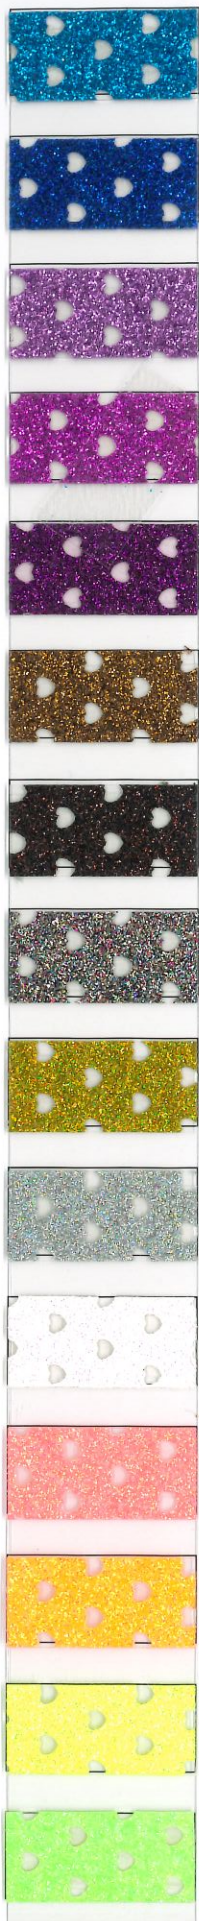


Star Mesh

● Glitter



● PU

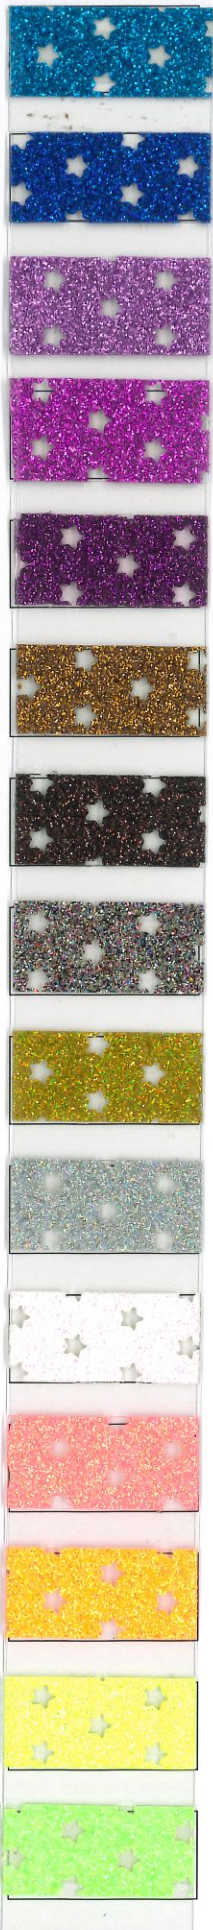

● Foil



NO BOUNDARIES TO WHERE YOU WANT TO GO.

TSGS Inc.

NO BOUNDARIES TO WHERE YOU WANT TO GO.



bluesign®
APPROVED

www.tsgs.asia

tape@tsgs.asia

+886-3-4389900

No.855, Huannan Rd., Guanyin Dist.,
Taoyuan City 328, Taiwan (R.O.C.)

